




THE FORMULA

Lighting Tips & Tricks

Getting maximum saturation from your gels

Ab Sesay (@absesay_photo) | Watch at: www.sekonic.com/formula01

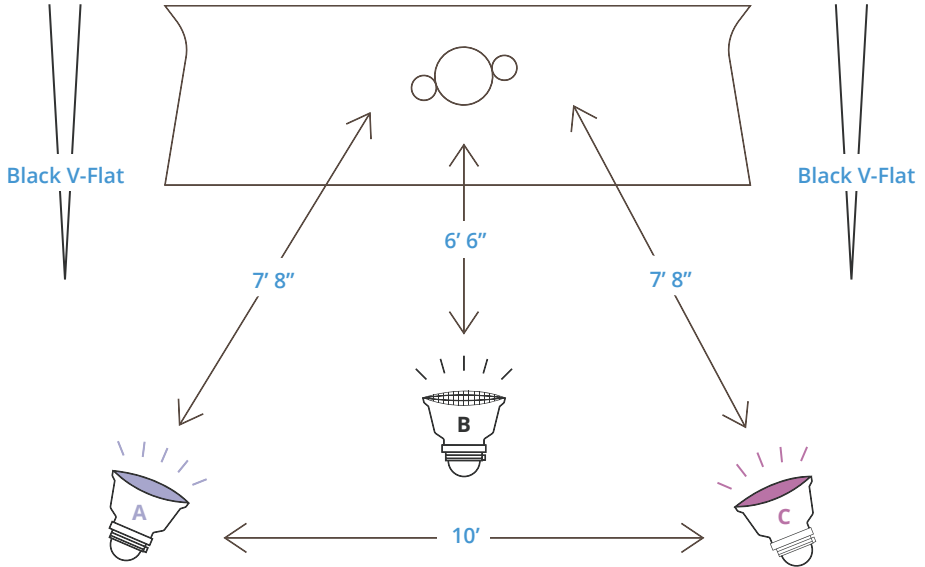

Light	Meter Reading	Gel	Height
A: 7" Reflector	f 8.0	Lee 132	7'
B: 7" Reflector w/10° Mark Grid	f 11.5	No Gel	7'
C: 7" Reflector	f 8.0	Lee 328	7'

SEKONIC®

Sekonic 478D-U LiteMaster Pro

Key Features:

- Ambient & Flash (PC Sync Terminal and Cordless Flash) *
- Incident and 5° Reflected Light Metering with Optional Viewfinder
- Photo, Cine, and HD Cine Metering Modes
- Flash Analyzing Function
- Exposure Profile Function
- Filter/Exposure/Calibration Compensation
- Custom Setting
- Runs on Two AAA Batteries

*Models also available for wireless radio flash measurements with PocketWizard (L-478DR-U), Elinchrom (L-478DR-EL), and Phottix (L478DR-PX).



SEKONIC[®]
CONTROL LIGHT