


Quick Guide to the Sekonic L-718

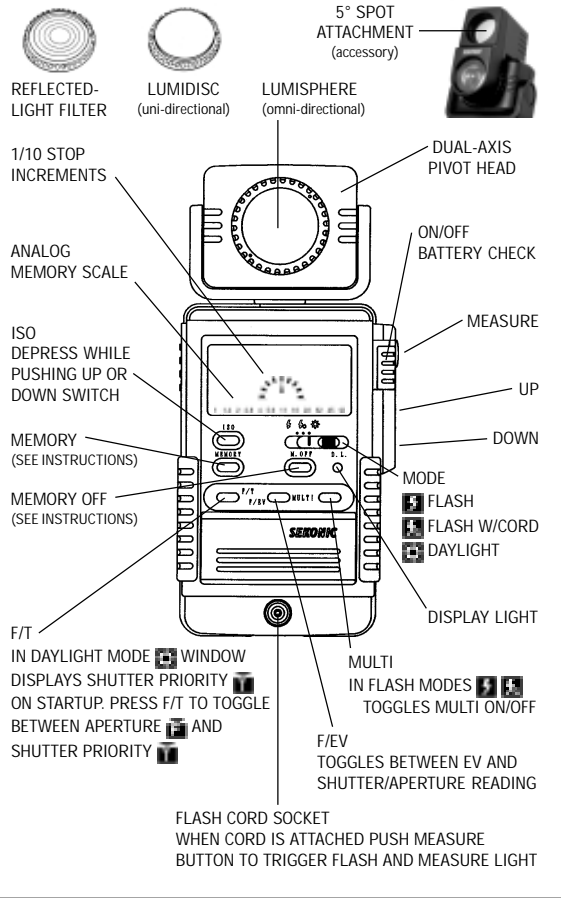

Basic Operation - Sekonic L-718

On/Off/Battery Check

Slide On/Off switch up. To check battery power hold down button. Battery strength is indicated briefly in 1/10th steps.

Set ISO

Hold down ISO button while depressing Up or Down button

Use as Reflected Meter

Attach Lumigrad or 5° Spot Attachment to Dual Axis Pivot Head


Use as Incident Meter

Attach Lumisphere to Dual Axis Pivot Head


Measure Brightness /Contrast Difference

Attach flat Lumidisc to Dual Axis Pivot Head

Daylight Reading

Select  Daylight Mode, depress Measure button

Cordless Flash Reading

Select  Flash Mode, depress Measure button, manually trigger flash



Flash Reading Using Flash Cord

Select  Flash with Cord Mode, insert flash cord, depress Measure button

EV Reading

Select  Daylight Mode, depress F/EV Button to see EV 

Select Shutter or Aperture Priority

Select  Daylight Mode. Toggle F/T button. Analog scale is shown in Shutter Priority mode 

Multi Flash Reading

in either flash mode, select Multi to read up to 9 consecutive flashes

Display Light

Press Display Light (D.L.) button at any time to illuminate readouts

Dual Axis Pivot Head

Pivot Receptor Head in any direction for easiest reading of display and best positioning of receptor

PRINTED IN USA